

OS2 PSU 30A / 60A



CONTROL PANELS OS2 PSU 30A / 60A

Features:

Control Panel featuring a 24V dc 30A / 60A Switch Mode Power Supply via 4/8 separate fused outputs. These can be individually controlled by separate inputs.

Auxillary output for powering control circuitry.

Increased functionality available through the addition of the OS2 power & control board.


Mainly used for larger single zone systems

The power supply unit is battery backed in mains power failure.

The unit is designed to comply fully with the requirements of **EN60950**

CE CERTIFIED

Compliant to applicable regulations.

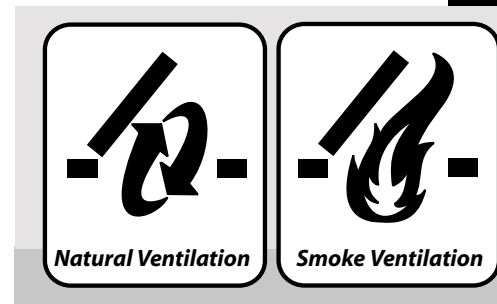


*Power & Control Board


OS2 PSU 30A / 60A

SE
CONTROLS

Technical Drawing



	A	B	C
30A	600mm	400mm	250mm
60A	600mm	600mm	250mm

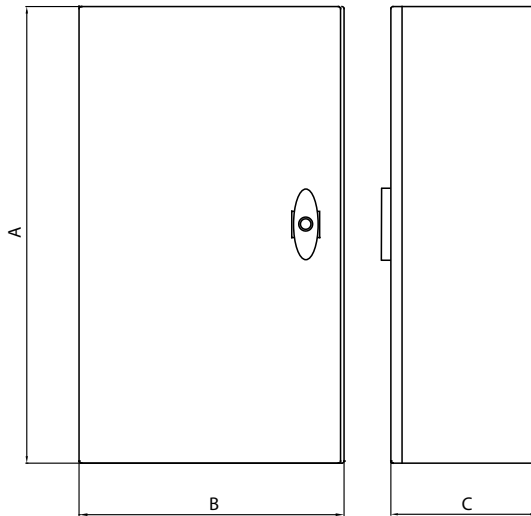

ALL MEASUREMENTS
IN mm



OS2
PSU

The AutoCAD drawing for this product can be found at www.secontrols.com

Device Details

- 912W Output power
- Fan cooled (Thermostatically controlled)
- Panel dimensions: **30A** (600 x 400 x 250mm) **60A** (600 x 600 x 250mm)
- High efficiency (typically >80%)
- Individually fused power outputs
- LED status indicators & status outputs provided
- Battery back up facility with low standby current
- 120/240V input

**MUST SPECIFY OS2 POWER & CONTROL BOARD SEPARATELY IF REQUIRED*

30A panel Part Number: **FCS00201030**

60A panel Part Number: **FCS00201060**