
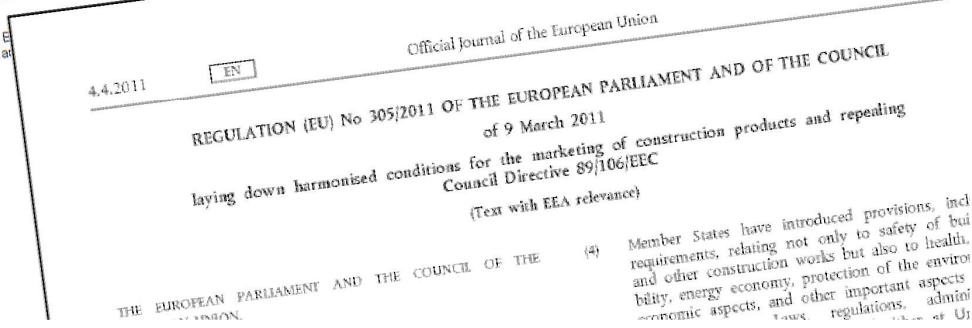


EN12101-2:2003
CE Certified NSHEV Solutions

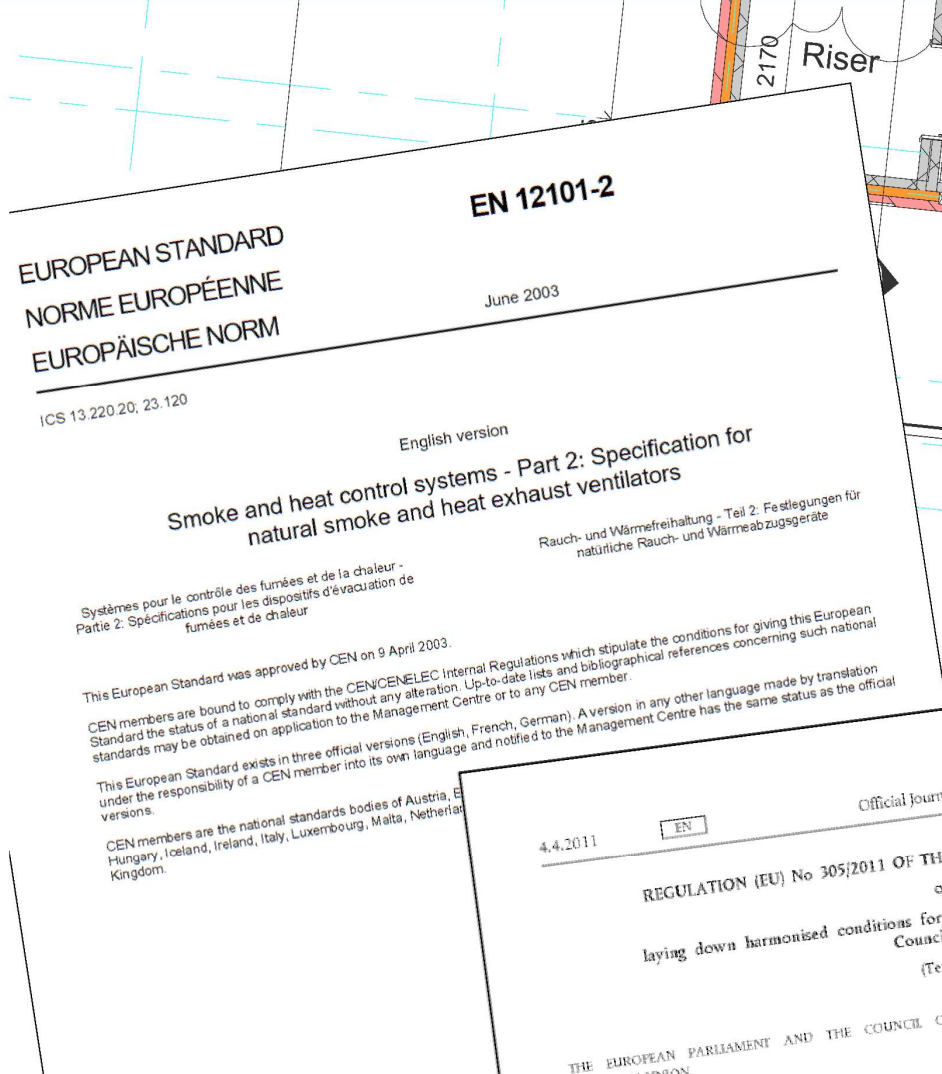

1

APA Facades ST70 SE Controls NSHEV

It is a mandatory requirement under the Construction Products Regulations (Regulation (EU) No 305/2011) for Natural Smoke and Heat Exhaust Ventilators (NSHEVs) to be CE certified as conforming to the Harmonised Standard EN12101-2:2003.

APA and SE Controls have collaborated on an extensive test and certification program with Applus+, a CE Approved Body (Approved Body Nr. 0370) to meet this requirement and ensure a seamless façade installation and performance can be provided.

The following APA frame systems can be certified under SE Controls' Tested Solutions program.

Frame System	Applications	Refer to
ST70	Side Hung, Top Hung, Bottom Hung Open Out	Section 4.1

2 Manufacturing

Prior to manufacturing an NSHEV it is important to seek guidance from SE Controls to ensure the NSHEV is manufactured under an annually audited EN12101-2 System 1 Factory Production Control process.

It is mandatory this is in place before manufacturing. Please register your interest to Façade.technical@secontrols.com

If an NSHEV is not manufactured under an EN12101-2 System 1 Factory Production Control process the product will not be certifiable by SE Controls.



Contact the SE Controls Façade Support Team

SE Controls
Lancaster House, Fradley, Lichfield
WS13 8RZ
Tel +44 1543 443060

Creating a **Healthier & Safer** Environment

3 Certification

3.1 Essential Characteristics declared on the SE Controls NSHEV Declaration of Performance (DoP) as defined by EN12101-2:2003 Annex ZA.1.

<u>Applus+ CCP Reference 0370-CPR-7123</u>		
Essential Characteristics	Clauses in This European Standard	Mandated Level(s) or Class(es)
Nominal Activation Conditions/sensitivity	4.1 4.2	24V dc.
Response relay (Time relay)	7.1.2	<60s
Operational Reliability	7.1 7.4	Re 1000 (Dual Purpose) WL1500
Effectiveness of smoke/hot gas extraction	6.	Pass
Aerodynamic free area	6.	Pass
Performance parameters under fire conditions	7.5	30
Resistance to fire – Mechanical stability	7.5	B300
Ability to open under environmental conditions	7.2 7.3	T(00) SL(0)
Fire reaction	7.5.2.1	E

“PASS”; Each NSHEV will have a specific aerodynamic free area based upon its dimensions, opening angle and applicable coefficient of discharge (Cv) of between 0.31 and 0.62.

3.2 Factory Production Control

The vent is manufactured, the actuator installed and the NSHEV completed under SE Controls' System 1 Factory Production Control (FPC) process, audited by the Approved Body, Applus+ in accordance with the requirements of the Construction Products Regulation (EU) No 305/2011 and EN12101-2:2003 product standard.

The Certificate of Constancy of Performance (CoCoP) issued by IFCC and Declaration of Performance (DoP) issued by SE Controls confirms the audited system 1 FPC process is in place.

The NSHEV is certified and placed upon the market by SE Controls in the capacity of the manufacturer.



Contact the SE Controls Facade Support Team

SE Controls
Lancaster House, Fradley, Lichfield
WS13 8RZ
Tel +44 1543 443060

Creating a **Healthier & Safer** Environment

4 APA Facades SE Controls NSHEV Certifiable Parameters

4.1 ST70 Window

Orientation	Maximum Outer Frame Width	Maximum Outer Frame Height	Minimum Outer Frame Width	Minimum Outer Frame Height	Maximum Outer Frame Weight	Glass Spec	Hinges	Actuator
Side Hung	1200mm	1500mm	500mm	685mm	55Kg	6mm + 6mm DGU	Giesse 07358N Butt Hinge	SECO Ni 24 40 Actuator Single
Side Hung	1200mm	2200mm	500mm	1350mm	80Kg	6mm + 6mm DGU	Giesse 07358N Butt Hinge	SECO Ni 24 40 Actuator Twin
Top Hung	1500mm	1200mm	685mm	500mm	55Kg	6mm + 6mm DGU	Giesse 07358N Butt Hinge	SECO Ni 24 40 Actuator Single
Top Hung	2200mm	1200mm	1350mm	500mm	80Kg	6mm + 6mm DGU	Giesse 07358N Butt Hinge	SECO Ni 24 40 Actuator Twin
Bottom Hung	1500mm	1200mm	685mm	500mm	55Kg	6mm + 6mm DGU	Giesse 07358N Butt Hinge	SECO Ni 24 40 Actuator Single
Bottom Hung	2200mm	1200mm	1350mm	500mm	80Kg	6mm + 6mm DGU	Giesse 07358N Butt Hinge	SECO Ni 24 40 Actuator Twin

4.2 Sash/Frame Combinations

Frame Reference	Sash Reference	Prep Detail Reference (Single Chain)	Prep Detail Reference (Twin Chain)
73ZS101102	73ZS108107	SEF_2736	SEF_2737

The information provided in this document must be used in conjunction with the APA Facades ST70 Technical Manual.



Contact the SE Controls Facade Support Team

SE Controls
Lancaster House, Fradley, Lichfield
WS13 8RZ
Tel +44 1543 443060

Creating a **Healthier & Safer** Environment

5 System Design and Installation Considerations

5.1 Free Area

The free area essential characteristic of an NSHEV is declared on the Declaration of Performance as “Aerodynamic Free Area”. Often building codes do not specify aerodynamic free areas, but instead require a Geometric Free Area (e.g., 1.5m²) and the two methods should not be confused.

A Geometric Free Area will be larger than the Aerodynamic Free Area for the same NSHEV, but they are not directly comparable.

Refer to the applicable design standard BS 9991:2024 (Section 20.1. Table 3 - Summary of Smoke Control Provisions)

Top Of stair Vent for a building below 11 meters tall: 0.7m² (Aerodynamic Free Area)

Top Of stair Vent for a building above 11 meters tall: 0.7m² (Aerodynamic Free Area)

Lobby / Corridor vent for a building above 11 meters tall: 0.9m² (Aerodynamic Free Area)

5.2 Controls

NSHEVs must be operated by a compatible EN12101-10 compliant control system; SE Controls recommends its OS series of control systems.

5.3 Safety: Entrapment Protection

Consideration should be given to the installation of suitable measures to mitigate the risks of entrapment.

NSHEVs should be closed/ reset via a local Manual Control Point (MCP) with a ‘biased off principle’*, or alternative safety measures/ operational procedures should be considered.

*Smoke Control Association: Guidance on Smoke Control to Common Escape Routes in Apartment Buildings (Flats and Maisonettes) Revision 3.1: July 2020

For advice on further safety considerations contact SE Controls.

5.4 Safety: Fall Restraint

Consideration should be given to the installation of suitable measures to mitigate the risks of falling through an NSHEV.

For advice on additional window restraint options contact SE Controls.

5.5 Installation & Maintenance

A smoke ventilation system should be designed, installed and maintained by a suitably competent and trained smoke ventilation specialist.

6 Support

Contact the SE Controls Technical Façade Team – Façade.technical@secontrols.com

SE Controls, Lancaster House, Wellington Crescent, Fradley, Lichfield, Staffs WS13 8RZ

Tel. +44 1543 443060 Website: www.secontrols.com



Contact the SE Controls Façade Support Team

SE Controls
Lancaster House, Fradley, Lichfield
WS13 8RZ
Tel +44 1543 443060

Creating a **Healthier & Safer** Environment