

SE Cloudlink™ Communications Hub



SE Cloudlink™

Our Remote Services solution SE Cloudlink™, allows the proactive management of site-based systems, by highlighting faults, system performance, trends, historical data and any service requirements. Using the latest technology, engineers are able to communicate with systems without the need to be on site.

Key Benefits of SE Cloudlink™

- Proactive management of life safety systems to improve building compliance.
- Improved efficiency and budget control, minimising disruption and reducing costs associated with expensive site visits
- Swift resolution to system problems.



Applications



Smoke Ventilation




Environmental Ventilation

SE CLOUDLINK™

Part Number

CLOUDLINK CONTROL PANEL
FCS00200286

How it Works

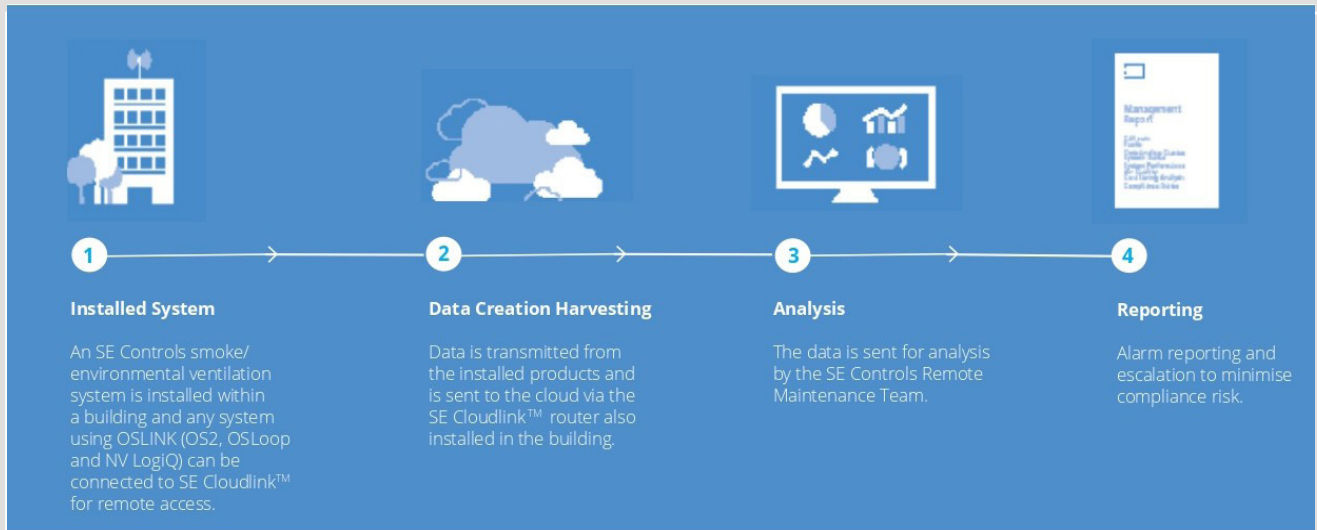

Technical Data

Power

- Supply 24V dc derived from OS2 SHEVTEC Controller, OSLoop, NVLogIQ

Environment

- IP20 rating
- Humidity range 10 to 90% Non-condensing
- Storage -20 to +75°C
- Operating temperature -10 to 50°C

Miscellaneous

- Dimensions 220 x 209 x 124 mm
- Cable entry via 2 end mounted cable glands 2 x 20 mm
- Communicates via OSLink protocol using integrated 4G/5G communications technology

Support Services

- Access to a qualified engineer
- Remote diagnostics and fix of problems
- Technical Support
- Individual site or portfolio support

Contact SE Controls for further information via:

info@secontrols.com

Alarm Status Indication

Healthy

Address	Zone	Updated	Device Type	Status
1.1		9mins 15sec	OS2 Training Room OS2 version 4.40 serial no. 39617	OK Normal Charger 34mins 10sec ago VA=30.84V Battery=0V Charge=19.16V / 0V Current=0.4 T=22.8°C
1.124		0sec	Cloud Interface (Network) version 0.01 serial no. 104	-

Fault

Address	Zone	Updated	Device Type	Status
1.1		26sec	OS2 Training Room OS2 version 4.40 serial no. 39617	Battery + Fault Normal Charger 39mins 38sec ago VA=31.02V Battery=19.9V Charge=26.82V / 26.8V Current=2.1 T=29.5°C
1.124		6sec	Cloud Interface (Network) version 0.01 serial no. 104	-

Fire Condition

Address	Zone	Updated	Device Type	Status
1.1		26sec	OS2 Training Room OS2 version 4.40 serial no. 39617	Active (Fire) Normal Charger 34mins 57sec ago VA=30.84V Battery=0V Charge=19.16V / 0V Current=0.4 T=22.8°C
1.124		6sec	Cloud Interface (Network) version 0.01 serial no. 104	-